

POOL LINING 11/01

ELBTAL POOL LINING



Flexible waterproofing membrane manufactured in plasticised polyvinyl chloride (PVP-P) and reinforced with fibres perfectly suited for pool lining.



Technical features

Context of use:

- For public and private pools with PVC membrane lining
- Skimmer and overflow edge technology with PVC membrane lining

Features:

- · Made in fully recyclable reinforced PVC
- Resistant to UV, cold temperatures and adverse weather conditions
- Good weldability and free from heavy metals
- Excellent physiological testing in compliance with EN 71/3
- Antimicrobial, resistant to all chemical products used for water treatment (according to chemical product instructions)
- Uses chemical and mechanical properties in compliance with international regulation
- Does not release dioxins into the atmosphere and can be recycled through degasification

- Strong and waterproof with a thickness of 1.5mm, guaranteeing an excellent pool seal
- Smooth and pleasant to the touch, durable and requires very little maintenance
- Resistant to pool detergents and water purification products, dependant on their individual instructions and a water temperature up to 28°C. Always read the label

Standards

- Manufactured in compliance with EN 13967, CE 071349-cpd-036
- Thanks to it's textured surface, Non-slip STG 200 pools, ensure safe walking on steps, ladders, children's areas and other areas of the pool where users frequently walk
- Our STG 200 pools offer excellent safety standards on non-slip surfaces, confirmed by the class c certification under DIN51097 and DIN EN 13451 standards



PRODUCT CODE	DESCRIPTION	m²
800800034	Light blue Elbtal pool lining m25 x 1.65	41.25
800800036	Non-slip light blue Elbtal pool lining m10 x 1.65	16.50
800800038	Blue Elbtal pool lining m25 x 1.65	41.25
800800040	Non-slip blue Elbtal pool lining m10 x 1.65	16.50
800800204	Green Elbtal pool lining m25 x 1.65	41.25
800800252	Non-slip green Elbtal pool lining m10 x 1.65	16.50
800800205	White Elbtal pool lining m25 x 1.65	41.25
800800253	Non-slip white Elbtal pool lining m10 x 1.65	16.50
800800207	Grey Elbtal pool lining m25 x 1.65	41.25
800800254	Non-slip grey Elbtal pool lining m10 x 1.65	16.50
800800208	Dark grey Elbtal pool lining m25 x 1.65	41.25
800800255	Non-slip dark grey Elbtal pool lining m10 x 1.65	16.50
800800030	Sand Elbtal pool lining m25 x 1.65	41.25
800800032	Non-slip sand Elbtal pool lining m10 \times 1.65	16.50
800800211	Black Elbtal pool lining m25 x 1.65	41.25
800800257	Non-slip black Elbtal pool lining m10 x 1.65	16.50
808800040	THF thinner I 1c	-
808800025	PVC PROFILE 9X3 mt.50	-
808800026	Liner lock pool lining PVC profile	-

AQUA ME - DATA SHEET 11/01 - ELBTAL POOL LINING V1_30.09.23



ELBTAL POOL LINING

ELBTAL SBG ISLAND DREAM

Flexible waterproofing membrane manufactured in plasticised polyvinyl chloride (PVP-P) and reinforced with fibres perfectly suited for pool lining. Island dreams transforms any pool and gives it a beautiful and natural look. Thanks to it's special surface coating and non-slip certification, island dreams can be used on steps, on the shores of pool beaches and even out of the water for a smooth, pleasant feel.



Technical features

Context of use:

- For public and private pools with PVC membrane lining
- Skimmer and overflow edge technology with PVC membrane lining

Features

- · Made in fully recyclable reinforced PVC
- Resistant to UV, cold temperatures and adverse weather conditions
- Good weldability and free from heavy metals
- Excellent physiological testing in compliance with EN 71/3
- Antimicrobial, resistant to all chemical products used for water treatment (according to chemical product instructions)
- Uses chemical and mechanical properties in compliance with international regulation
- Does not release dioxins into the atmosphere and can be recycled through deagsification
- Strong and waterproof with a thickness of 1.5mm, guaranteeing an excellent pool seal
- Smooth and pleasant to the touch, durable and requires very little maintenance
- Resistant to pool detergents and water purification products, dependent on their individual instructions and a water temperature up to 28°C.
 Always read the label.

Standards:

- Manufactured in compliance with EN 13967, CE 071349-cpd-036
- Thanks to it's textured surface, Non-slip STG 200 pools, ensure safe walking on steps, ladders, children's areas and other areas of the pool where users frequently walk
- Our STG 200 pools offer excellent safety standards on non-slip surfaces, confirmed by the class c certification under DIN51097 and DIN EN 13451 standards







CAPRI

HAWAII





BALI

TAHITI



PRODUCT CODE	DESCRIPTION
808800025	PVC profile 9 x 3 mt.50
808800026	Liner lock pool lining PVC profile
808800040	THF thinner 1
800800259	Elbe island dreams Capri pool lining -H 1.60 x 20 mthick 1.5 mm
800800261	Elbe island dreams Hawaii pool lining -H 1.6 x 20 mthick 1.5mm
800800260	Elbe island dreams Bali pool lining -H 1.6 x 20mthick 1.5mm
800800258	Elbe island dreams Tahiti pool lining -H 1.6 x 20mthick 1.5mm



POOL LINING 11/01

ELBTAL POOL LINING

ELBTAL SGB ELITE

Flexible waterproofing membrane manufactured in plasticised polyvinyl chloride (PVP-P) and reinforced with fibres perfectly suited for pool lining. The ELITE coating provides an excellent barrier against sunscreen due to its special surface lacquering and it has a high resistance to chemicals and fading.



Technical features

Context of use:

- For public and private pools with PVC membrane lining
- Skimmer and overflow edge technology with PVC membrane lining

Features:

- Made in fully recyclable reinforced PVC
- Resistant to UV, cold temperatures and adverse weather conditions
- Good weldability and free from heavy metals
- Excellent physiological testing in compliance with EN 71/3
- Antimicrobial, resistant to all chemical products used for water treatment (according to chemical product instructions)
- Uses chemical and mechanical properties in compliance with international regulation
- Does not release dioxins into the atmosphere and can be recycled through degasification
- Strong and waterproof with a thickness of 1.5mm, guaranteeing an excellent pool seal
- Smooth and pleasant to the touch, durable and requires very little maintenance
- Resistant to pool detergents and water purification products, dependent on their individual instructions and a water temperature up to 28°C.
 Always read the label.

Standards:

- Manufactured in compliance with EN 13967, CE 071349-cpd-036
- Thanks to it's textured surface, non-slip STG 200 pools, ensure safe walking on steps, ladders, children's areas and other areas of the pool where users frequently walk
- Our STG 200 pools offer excellent safety standards on non-slip surfaces, confirmed by the class c certification under DIN51097 and DIN EN 13451 standards







WHITE ARTIC

SAND BEACH





DEEP SEA

BLUE SKY




Q Models

PRODUCT CODE	DESCRIPTION
808800025	PVC profile 9 x 3 mt.50
808800026	Liner lock pool lining PVC profile
808800040	THF thinner I 1

	PRODUCT CODE	DESCRIPTION
	800800262	Elbe elite white arctic pool lining - H 1.65 x 25 m
	800800266	Non/slip elbe elite white arctic pool lining - H 1.65 x 10 m $$
	800800263	Elbe elite sand beach pool lining - H 1.65 x 25 m
	800800267	Non/slip elbe elite sand beach pool lining - H 1.65 x 10 m $$
	800800264	Elbe elite deep sea pool lining - H 1.65 x 25 m
	800800268	Non/slip elbe elite deep sea pool lining - H 1.65 x 10 m
	800800265	Elbe elite blue sky pool lining - H 1.65 x 25 m
	800800269	Non/slip elbe elite blue sky pool lining - H $1.65\mathrm{x}$ 10 m

AQUA ME - DATA SHEET 11/01 - ELBTAL POOL LINING V1_30.09.23

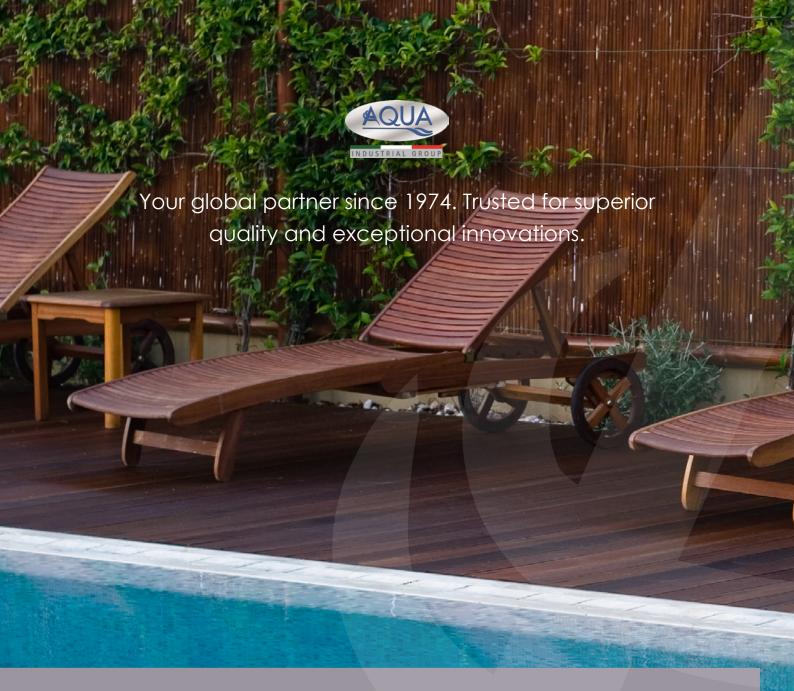



Head Office

42018 San Martino in Rio, Reggio Emilia Italy - Via Crotti, 1 P: +39 0522 695805/85 - F +39 0522 646160 aqua@aqua.it | www.aqua.it



Branches

Unit 135 Oak Drive Hartlebury Trading Estate, Worcestershire, DY10 4JB P:+44 (0)1299 251050, F:+44 (0)1299 253704 sales@askaqua.co.uk | www.askaqua.co.uk

AQUA FILTRACION S.A.Pol. Ind. Castellbisbal Sud 08755
Castellbisbal, Barcelona

AQUA SU ARITIMI SAN. VE MUH. TIC. LTD. STI.
Ferhatpasa Mahallesi Maresal Fevzi Cakmak
Cad. No:45 Pk.34888 Atasehir / Istanbul - Turkey
P: +90 216 661 60 60, F: +90 216 661 68 50
info@aqua.com.tr | www.aqua.com.tr



AQUA GROUP LLC
Office: Regus – Sarayat EL Maadi, Egypt
Management & Warehouse: Plot no 2-2nd service
axe, 2nd Industrial Zone, October, Egypt
P: +20 2 3820 2259 | info@aqua.eg