

FOUNTAIN NOZZLES 20/03

FOUNTAIN LIGHTS



STAINLESS STEEL LED ROTATABLE STAND LIGHT MOD 1


✓ Technical features

- Beam angle: 30° (standard) or 10°, 60°, 90° and 120° (optional)
- Available colours: White, warm white and RGB
- Lifespan: 50,000hrs, L70 @ 25C
- Single colour or auto RGB colour control change, 4 wires
- Colour change with remote control (DM x 512)
- Installation method: clamp type, disc type, U shape bracket (optional)
- Manufactured in AISI-304 stainless steel
- High light transmission
- Tempered glass, anti-aging silicone sealing ring
- Cable: 1m waterproof underwater cable
- Operating temperature: -40°C ~ +45°C
- Ambient temperature - 40°C ~ +70°C
- Certification: CE, RoHs, ISO9001
- Waterproof rating: IP68


📏 Dimensions




AQ-80-MOD1

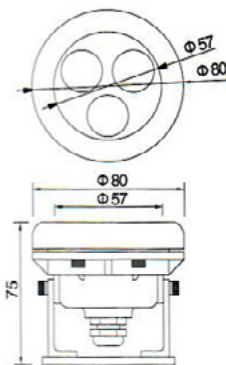

AQ-128-MOD1

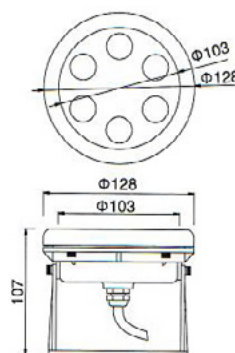

AQ-195-MOD1

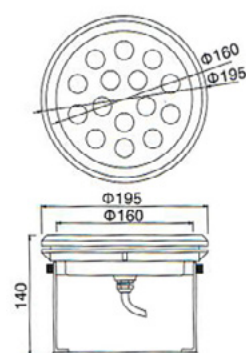

🔍 Models

PRODUCT CODE	DESCRIPTION	WATT	VOLTAGE AC/DC	NO OF LED	PACKING	Weight Kg	VOLUME m³
AQ-80-MOD1	Stainless Steel Led Rotatable Stand Light	3	24V	3x1w	1	1.0	
AQ-128-MOD1		9	24V	9x1w	1	2.5	
AQ-195-MOD1		15	24V	15x1w	1	3.0	

PS: add at the end of the code -W for white color, -WW for warm white color, -RGB for color changing


FOUNTAIN NOZZLES 20/03

FOUNTAIN LIGHTS


STAINLESS STEEL LED ROTATABLE STAND LIGHT MOD2




Dimensions

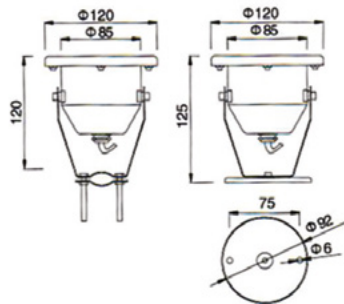


AQ-120-MOD2

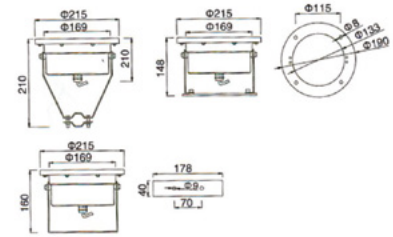


AQ-215-MOD2

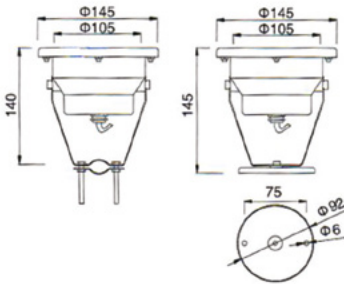


AQ-145-MOD2

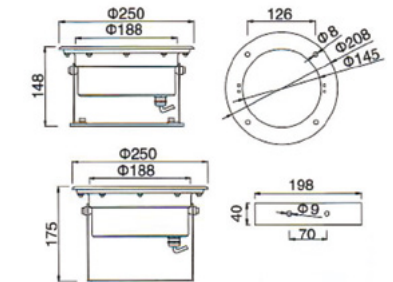

AQ-250-MOD2

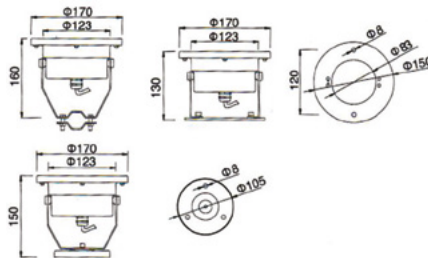

AQ-170-MOD2

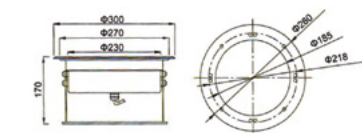

AQ-300-MOD2

Models

PRODUCT CODE	DESCRIPTION	WATT	VOLTAGE AC/DC	NO OF LED	Packing	Weight Kg	VOLUME m ³
AQ-120-MOD2	Stainless Steel Led Rotatable Stand Light	3	24V	3x1w	1	0.8	
AQ-145-MOD2		9	24V	9x1w	1	1.2	
AQ-145-MOD2-3		18	24V	6x3w	1	1.2	
AQ-170-MOD2		15	24V	15x1w	1	1.8	
AQ-170-MOD2-3		36	24V	12x3w	1	1.8	
AQ-215-MOD2		30	24V	30x1w	1	2.5	
AQ-215-MOD2-3		54	24V	18x3w	1	2.5	
AQ-250-MOD2		45	24V	45x1w	1	3.7	
AQ-250-MOD2-3		72	24V	24x3w	1	3.7	
AQ-300-MOD2		72	24V	72x1w	1	6.0	
AQ-300-MOD2-3		144	24V	48x3w	1	6.0	

PS: add at the end of the code -W for white color, -WW for warm white color, -RGB for color changing

FOUNTAIN NOZZLES

FOUNTAIN NOZZLES 20/03

FOUNTAIN LIGHTS




STAINLESS STEEL FOUNTAIN NOZZLE LIGHT MOD 1


Dimensions




AQ-150-FNL1

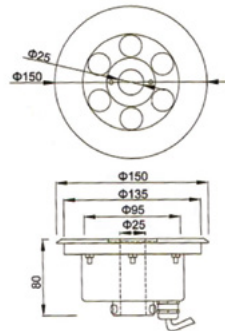


AQ-180-FNL1

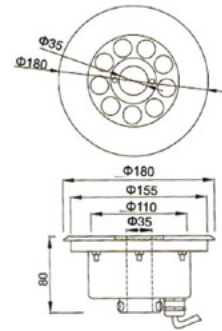


AQ-200-FNL1

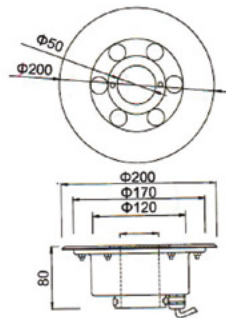

AQ-220-FNL1

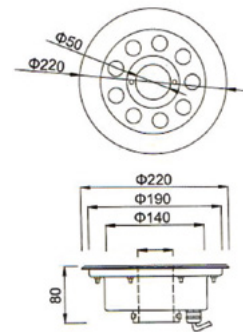

AQ-260-FNL1

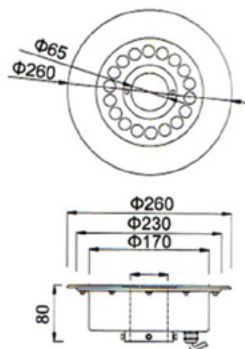

Models

PRODUCT CODE	DESCRIPTION	WATT	VOLTAGE AC/DC	CENTER HOLE A	NO OF LED	PACKING	WEIGHT Kg	VOLUME m ³
AQ-150-FNL1	Stainless Steel Fountain Nozzle Light	6	24V	25	3x1w	1	1.5	
AQ-180-FNL1		6	24V	35	6x1w	1	2.0	
AQ-200-FNL1		9	24V	42/50	9x3w	1	2.5	
AQ-220-FNL1		12	24V	42/50/65	12x1w	1	3.0	
AQ-260-FNL1		24	24V	65/80	24x1w	1	4.5	

PS: add at the end of the code -W for white color, -WW for warm white color, -RGB for color changing

FOUNTAIN NOZZLES


FOUNTAIN LIGHTS

STAINLESS STEEL FOUNTAIN NOZZLE LIGHT MOD2


Dimensions




AQ-220-FNL2

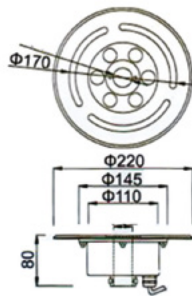


AQ-230-FNL2

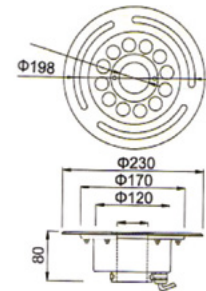

AQ-270-FNL2

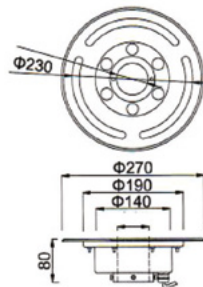

AQ-J300-FNL2

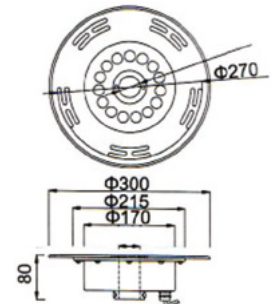

Models

PRODUCT CODE	DESCRIPTION	WATT	VOLTAGE AC/DC	NO OF LED	PACKING	WEIGHT Kg	VOLUME m ³
AQ-220-FNL2	Stainless Steel Fountain Nozzle Light	18	24V	6x3w	1	2.5	
AQ-230-FNL2		27	24V	9x3w	1	3.0	
AQ-270-FNL2		36	24V	12x3w	1	4.0	
AQ-J300-FNL2		54	24V	18x1w	1	5.5	


PS: add at the end of the code -W for white color, -WW for warm white color, -RGB for color changing

FOUNTAIN NOZZLES 20/03

FOUNTAIN LIGHTS

STAINLESS STEEL LED WALL WASHER

Dimensions


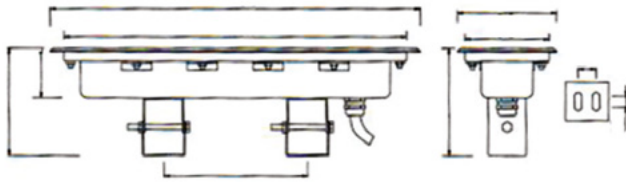


Models

PRODUCT CODE	DESCRIPTION	WATT	VOLTAGE AC/DC	NO OF LED	DIMENSIONS mm				Packing	Weight Kg	VOLUME m³
					A	B	C	D			
AQ-XT001	Stainless Steel Led Wall Washer	4	24V	4x1w	230	158	198	210	1	1.5	
AQ-XT002		18	24V	18x1w	430	358	398	410	1	2.0	
AQ-XT003		24	24V	24x1w	630	-	598	610	1	2.5	
AQ-XT004		36	24V	36x1w	830	-	798	810	1	3.0	
AQ-XT005		48	24V	48x1w	1050	-	1018	1030	1	4.5	

STAINLESS STEEL LED BURIED LIGHT

Dimensions

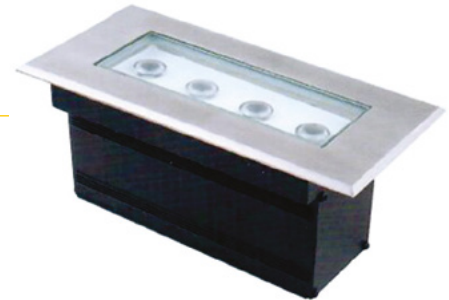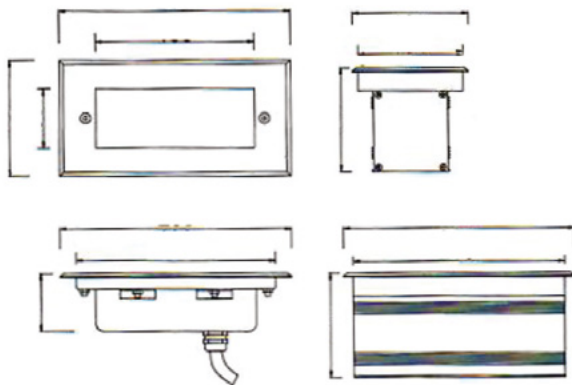

Models

PRODUCT CODE	DESCRIPTION	WATT	VOLTAGE AC/DC	NO OF LED	DIMENSIONS mm				Packing	Weight Kg	VOLUME m³
					A	B	C	D			
AQ-XT006	Stainless Steel Led buried light	4	24V	4x1w	230	158	198	210	1	2.4	
AQ-XT007		18	24V	18x1w	430	358	398	410	1	4.3	
AQ-XT008		24	24V	24x1w	630	-	598	610	1	6.3	
AQ-XT009		36	24V	36x1w	830	-	798	810	1	8.2	
AQ-XT010		48	24V	48x1w	1050	-	1018	1030	1	9.7	

FOUNTAIN NOZZLES 20/03

FOUNTAIN LIGHTS



1000W

2000W

350W

UNDERWATER TRANSFORMER

✓ Technical features

- Manufactured in AISI-304 stainless steel
- High quality copper core coil and imported iron core
- Waterproof underwater cable
- Operating temperature: -40°C ~ +45°C
- Ambient temperature: -40°C ~ +70°C
- Waterproof rating: IP68

Q Models

PRODUCT CODE	DESCRIPTION	POWER Watt	INPUT VOLTAGE	OUTPUT VOLTAGE	PACKING	WEIGHT Kg	VOLUME m ³
AQ-UW1000	Under Water Transformer	1000	220V	24VAC	1	10	
AQ-UW2000		2000	220V	24VAC	1	12.5	
AQ-UW350		350	220V	24VAC	1	5	

LED RGB CONTROLLER

✓ Technical features

- 32 changing modes
- PC engineering plastic shell
- Smooth changing effect without flicker
- The receiver has 8 keys (ON/OFF, PAUSE, MODE+/-, SPEED+/-, BRT+/-)
- Compatible with RF remote
- RF Remote Distance: 100m
- Radio Frequency: 433.92 MHz
- Radio Output Power: 8 W
- Working Temperature: -30°C ~ 55°C
- Dimensions: L 211mm × W 40mm × H 30mm



Q Models

PRODUCT CODE	DESCRIPTION	INPUT VOLTAGE	MAX CURRENT LOAD	MAX OUTPUT POWER	PACKING	WEIGHT Kg	VOLUME m ³
AQFT-RC	LED FOUNTAIN RGB CONTROLLER WITH REMOTE CONTROL	12 ~ 24V DC	6A X 3CH	216W/432W(12V/24V)	1	0.240	

POWER REPEATER

✓ Technical features

- 12-36V constant voltage power repeater
- 3 channel, 10A per channel
- To receive PWM signal control
- Power repeater in series or in parallel to expand output without limits
- Applies to single colour or RGB, constant voltage, LED strip or module
- Ambient temperature: -30°C ~ +55°C
- Case temperature (Max.): +85°C
- Output voltage: 3 x (12-36)VDC
- Rating: IP20
- Safety standard (LVD): EN60950
- EMC standard (EMC): EN301 489, EN 62479



Q Models

PRODUCT CODE	DESCRIPTION	INPUT VOLTAGE	INPUT CURRENT	MAX OUTPUT POWER	PACKING	WEIGHT Kg	VOLUME m ³
AQFT-REP	Channel Constant Voltage Power Repeater	12-36VDC	30.5 A	3 x (120-360)W	1	0.270	



Your global partner since 1974. Trusted for superior quality and exceptional innovations.



Head Office

AQUA S.p.A

42018 San Martino in Rio, Reggio Emilia
Italy - Via Crotti, 1
P: +39 0522 695805/85 - F: +39 0522 646160
aqua@aqua.it | www.aqua.it

AQUA S.p.A - POOL DIVISION

46043 Castiglione d. Stiviere, Mantova - Italy
P: +39 0376 671973 - F: +39 0376 940139
infpools@aqua.it | www.aqua.it



Branches

AQUA WATER SYSTEMS LTD

Unit 135 Oak Drive Hartlebury Trading Estate,
Worcestershire, DY10 4JB
P: +44 (0)1299 251050, F: +44 (0)1299 253704
sales@askaqua.co.uk | www.askaqua.co.uk

AQUA FILTRACION S.A.

Pol. Ind. Castellbisbal Sud 08755
Castellbisbal, Barcelona
P: +34 (0)93 7711855, F: +34 (0)93 7711772
info@aqua.es | www.aqua.es

AQUA SU ARITIMI SAN. VE MUH. TIC. LTD. STI.

Ferhatpasa Mahallesi Maresal Fevzi Cakmak
Cad. No:45 Pk.34888 Atasehir / Istanbul - Turkey
P: +90 216 661 60 60, F: +90 216 661 68 50
info@aqua.com.tr | www.aqua.com.tr

AQUA MIDDLE EAST FZC

1J-07/4 and 1J-07/3 - Hamriyah Free Zone
P.O.Box 42585 Sharjah - United Arab Emirates
P: +971 6 526 0563, F: +971 6 526 0564
contact@aqua-me.ae
www.aqua-me.ae

AQUA WATER SYSTEMS INDIA PVT LTD

4A/4B/4C-Puttappa Industrial Estate
Mahadevapura Post, White Field Road,
Bangalore 560 048
P: 0091 80 4152 1313, F: 0091 80 4152 1414
contact@aquaindia.in | sales@aquaindia.in
www.aquaindia.in

AQUA GROUP RUS

Juridical Address:
107014, Egerskaya str, 1, Moscow, Russia
Residence Address:
127081, Chermianskaya str, 3, Moscow, Russia
P: +7 495 6458078, F: +7 495 969 2413
mail@aqua-italy.ru | www.aqua-italy.ru
www.aqua.it

AQUA GROUP LLC

Office : Regus – Sarayat EL Maadi, Egypt
Management & Warehouse : Plot no 2-2nd service
axe, 2nd Industrial Zone, October, Egypt
P: +20 2 3820 2259 | info@aqua.eg