



TEMPERATURE CONTROL 14/01

HEAT PUMP TOP/FRONT DISCHARGE INVERTER

Incorporates purpose-built components for long lasting and high efficiency that achieves maximum results. Internal fins, containing high performance titanium dioxide TiO₂, provides a corrosion resistance, impermeable ice formation and a dustproof evaporator coil.



Technical features

- Used for heating or cooling residential and public pools such as hotels, schools, fitness centres, and aqua parks
- From 16kW up to 200kW
- High efficiency that reaches up to 13 COP, reduces energy usage and enables a longer swimming season
- Unique design metal cabinet with integrated control system
- Inverter fan with low noise level and vertical air discharge. As a result, the sound level of the unit at 1 meter, is as low as 40dB(A) under silence mode
- Defrosting: At reduced noise levels, the unit defrosts the evaporator when the ventilator is activated
- High/Low pressure protection available
- Intelligent touch screen LCD control system can be connected to BMS or Wi-Fi
- Titanium Heat Exchanger
- Titanium dioxide TiO₂ coating for the evaporator provides protection from corrosion and delivers maximum life expectancy
- Mitsubishi inverter compressor with R410A Refrigerant
- Phase monitor: Protects the compressor in case of phase loss or inversion
- Super Silent:
 - The compressor inside the unit is wrapped with a new noise reduction internal sponge, proven to effectively reduce sound levels
 - The Mitsubishi Inverter compressor produces a much lower running noise level
 - A newly developed fan blade design is employed within the heat pump which makes the unit run even quieter
- An electronic expansion valve, on each compressor, regulates the refrigerant flow rate to ensure the unit operates with high efficiency in different weather conditions



Wifi
Connectivity



TiO₂
Coating



COP
up to 13



Electronic
Expansion Valve



Inverter
Compressor



Titanium Heat
Exchanger



Inverter
Fan

TEMPERATURE CONTROL


SIMPLIFY YOUR LIFE WITH THE ELECRO APP

Connection via Wi-Fi and 4G enables you to take full control of your swimming pool heat pump from anywhere in your home or office with a simple app on your smartphone.





SOFT START

Aqua Full Inverter Pool Heat Pumps achieve a stairlike rise of the compressor frequency. When the unit starts, the current will gradually rise from 0A to half of the rated current, and then rise step-by-step to the rated current within a few minutes. Normal on/off heat pumps start with an instantaneous current over 6 times higher than the full-inverter heat pumps, which will be harmful to the home electricity system.

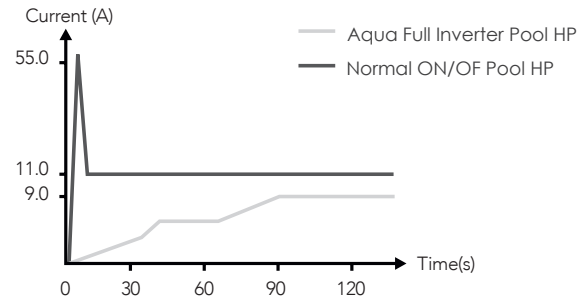


HIGH ENERGY EFFICIENCY AND LARGE RUNNING RANGE

Aqua Full Inverter Pool Heat Pumps can reach a COP as high as 12.5 at the ambient condition (Air 26°C/Humidity 80%) and keep a high EER at 53°C ambient temperature.

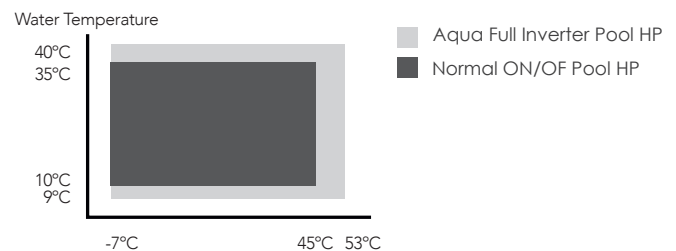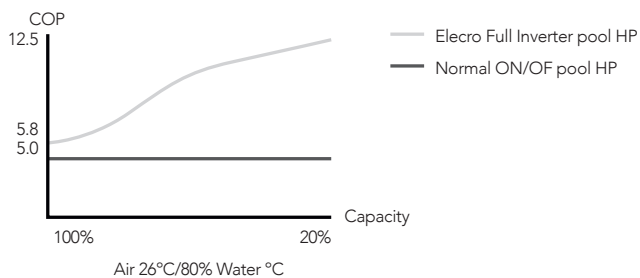

24DB(A) LOW NOISE AT 10M DISTANCE

The Aqua Full Inverter Pool Heat Pump is specially designed with a silence mode to create a comfortable living environment for users at night. Under silence mode, the heat pump is running at 24dB(A) low noise, equivalent to a whisper.

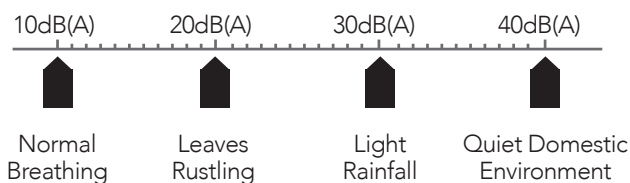

TOP DISCHARGE

Models

MODEL	INTOP-3016	INTOP-3021	INTOP-3024	INTOP-3024 S
PERFORMANCE CONDITION	A27 / W26 C°			
Heating Output (kW)	5.11-16.00	6.2-21.1	6.72-23.7	6.72-23.7
Power Input (kW)	0.32-2.43	0.45-3.2	0.46-3.65	0.46-3.65
COP	15.97-6.58	13.7-6.6	14.61-6.49	14.61-6.49
PERFORMANCE CONDITION	A15 / W26 C°			
Heating Output (kW)	3.72-12.00	4.8-16.9	4.8-17.3	4.8-17.3
Power Input (kW)	0.52-2.40	0.68-3.1	0.63-3.83	0.63-3.83
COP	7.15-5.00	7.06-5.45	7.6-4.52	7.6-4.52
PERFORMANCE CONDITION	A45 / W30 C°			
Cooling Output (kW)	3.66-6.53	2.8-11.9	2.8-11.9	2.9-12.5
Power Input (kW)	0.91-2.12	0.7-4.5	0.7-4.6	0.73-5.0
EER	4.02-3.08	4.0-2.64	4.0-2.64	3.96-2.5
PERFORMANCE CONDITION	A35 / W30 C°			
Cooling Output (kW)	4.00-9.00	3.3-14.0	3.5-14.0	3.5-16.2
Power Input (kW)	0.80-3.00	0.55-4.0	0.55-4.0	0.60-5.0
EER	5.00-3.00	6.0-3.5	6.0-3.5	5.8-3.24
Power Supply (V/Hz/Ph)	220-240/1/50/60	220-240/1/50/60	220-240/1/50/60	380-415/3/50/60
Rated Heating Capacity (kW)	16	21	24	24
Rated power Input (kW)	3.5	4.6	4.7	5.1
Rated current (A)	15	20	20	9
Compressor Type-Quantity	1	1	1	1
Fan type	DC	DC	DC	DC
Fan Quantity	1	1	1	1
Fan Air flow (m3/ h)	2400	3500	4000	4000
Throttling device	EEV	EEV	EEV	EEV
Sound pressure level 1/3/5/10 (dB(A))	53/46/42/36	53/46/42/36	54/47/43/37	54/47/43/37
Water Side Heat Exchanger Type	Twisted Titanium Heat Exchanger			
Water Pressure Drop (kPa)	15	16	18	18
Water connection (mm)	threaded /50	threaded /50	threaded /50	threaded /50
Nominal Water Flow (m3/h)	5.2	6.8	7.7	7.7
Operating temperature range-Heating (°C)	-15~43			
Operating temperature range-Cooling (°C)	5~43			
Leaving water temprature range-Heating (°C)	18~40			
Leaving water temprature range-Cooling (°C)	12~40			
Refrigerant Type	R32/R410A			
Refrigerant GWP	675			
Refrigerant charge (kg)	1.4	1.4	1.4	1.4
Operation Pressure Low Side (Mpa)	2.1	2.1	2.1	2.1
Operation Pressure High Side (Mpa)	4.4	4.4	4.4	4.4
Unit size (mm)	670×670×930	715×715×980	715×715×980	715×715×980
Packing size (mm)	730×730×1075	765×765×1135	765×765×1135	765×765×1135
Unit Net weight (kg)	84/98	103/121	105/126	108/126

TOP DISCHARGE

Models

MODEL	INTOP-3028 S	INTOP-3030 S	INTOP-3035 S	INTOP-3045 S
PERFORMANCE CONDITION	A27 / W26 C°			
Heating Output (kW)	6.72-28	8.5-30.5	7.1-35.0	10.5-47.5
Power Input (kW)	0.46-4.5	0.59-4.7	0.62-6.73	0.78-7.8
COP	14.61-6.22	14.3-6.5	11.4-5.2	13.5-6.09
PERFORMANCE CONDITION	A15 / W26 C°			
Heating Output (kW)	4.8-20.5	6.4-23.8	6.4-27.5	7.85-36.5
Power Input (kW)	0.63-4.4	0.82-4.5	0.97-6.63	1.08-7.6
COP	7.6-4.66	7.8-5.29	6.6-4.15	7.27-4.8
PERFORMANCE CONDITION	A45 / W30 C°			
Cooling Output (kW)	2.9-13.2	4.76-15.5	4.76-15.7	5.7-24.3
Power Input (kW)	0.73-5.5	1.21-6.1	1.21-6.2	1.46-9.2
EER	3.96-2.4	3.93-2.54	3.93-2.53	3.9-2.63
PERFORMANCE CONDITION	A35 / W30 C°			
Cooling Output (kW)	3.5-16.5	5.8-18.9	5.8-19.6	7.05-33.0
Power Input (kW)	0.6-5.0	1.0-5.73	1.0-6.1	1.2-9.8
EER	5.8-3.11	5.75-3.3	5.75-3.21	5.88-3.37
Power Supply (V/Hz/Ph)	380-415/3/50/60	380-415/3/50/60	380-415/3/50/60	380-415/3/50/60
Rated Heating Capacity (kW)	28	30	35	45
Rated power Input (kW)	5.7	6.2	7.7	10.2
Rated current (A)	10	11	34	18
Compressor Type-Quantity	1	1	1	1
Fan type	DC	DC	DC	DC
Fan Quantity	1	1	1	1
Fan Air flow (m3/ h)	5000	5500	6000	8000
Throttling device	EEV	EEV	EEV	EEV
Sound pressure level 1/3/5/10 (dB(A))	54/47/43/38	55/48/44/39	56/49/45/40	59/53/49/43
Water Side Heat Exchanger Type				
Water Pressure Drop (kPa)	20	23	25	28
Water connection (mm)	threaded /50	threaded /50	threaded /50	threaded /63
Nominal Water Flow (m3/h)	9.0	9.7	11.3	14.5
Operating temperature range-Heating (°c)	-15~43			
Operating temperature range-Cooling (°c)	5~43			
Leaving water temprature range-Heating (°c)	18~40			
Leaving water temprature range-Cooling (°c)	12~40			
Refrigerant Type	R32/R410A			
Refrigerant GWP	675			
Refrigerant charge (kg)	1.9	1.9	1.9	2.8
Operation Pressure Low Side (Mpa)	2.1	2.1	2.1	2.1
Operation Pressure High Side (Mpa)	4.4	4.4	4.4	4.4
Unit size (mm)	860x860x1085	860x860x1085	860x860x1085	950x950x1280
Packing size (mm)	920x920x1240	920x920x1240	920x920x1240	1025x1025x1430
Unit Net weight (kg)	128/150	130/152	137/159	221/241

TOP DISCHARGE

Models

MODEL	INTOP-3055 S	INTOP-3065S	INTOP-3110S	INTOP-3150 S	INTOP-3220S
PERFORMANCE CONDITION	A27 / W26 C°				
Heating Output (kW)	12.0-56.3	14.5-65.0	24.2-110	37.8-160.0	48.5-220
Power Input (kW)	0.90-9.2	1.10-10.80	1.8-18.5	2.75-26.2	3.58-36.9
COP	13.3-6.1	13.18-6.02	13.44-6.16	13.75-6.11	13.55-6.10
PERFORMANCE CONDITION	A15 / W26 C°				
Heating Output (kW)	9.2-42.0	12.1-50.0	18.5-85.0	27.1-123.2	37.1-172
Power Input (kW)	1.3-8.8	1.92-11.50	2.6-17.5	3.67-26.2	5.1-35.3
COP	7.08-4.77	6.30-4.35	7.12-4.86	12.62-5.86	7.27-4.87
PERFORMANCE CONDITION	A45 / W30 C°				
Cooling Output (kW)	6.4-26.2	9.2-30.5	12.8-52.5	23.0-83.2	25.5-105
Power Input (kW)	1.68-9.5	2.45-10.66	3.35-20.0	5.90-30.9	6.75-40.2
EER	3.81-2.75	3.76-2.86	3.82-2.63	3.90-2.69	3.78-2.61
PERFORMANCE CONDITION	A35 / W30 C°				
Cooling Output (kW)	8.6-35.0	13.0-39.0	17.0-70.3	28.0-112.0	34.0-141
Power Input (kW)	1.32-10.0	2.32-12.50	2.65-20.0	4.34-31.5	5.3-40.0
EER	6.52-3.5	5.60-3.12	6.42-3.52	6.45-3.55	6.42-3.53
Power Supply (V/Hz/Ph)	380-415/3/50/60	380-415/3/50/60	380-415/3/50/60	380-415/3/50/60	380-415/3/50/60
Rated Heating Capacity (kW)	55	65	110	150	220
Rated power Input (kW)	10.7	16	21.4	32.0	43.4
Rated current (A)	19	29	38	57	78
Compressor Type-Quantity	1	1	2	4	4
Fan type	DC	DC	DC	DC	DC
Fan Quantity	1	1	1	2	2
Fan Air flow (m3/ h)	10000	12000	24000	28000	48000
Throttling device	EEV	EEV	EEV	EEV	EEV
Sound power level 1m (dB(A))	62/55/52/46	62/55/52/46	65/59/56/50	66/60/57/52	68/62/59/54
Water Side Heat Exchanger Type					
Water Pressure Drop (kPa)	30	30	30	30	34
Water Connection (mm)	threaded /63	threaded /63	flange/ 90	flange/ 110	flange/ 110
Nominal Water Flow (m3/h)	17.7	21	35.4	48.3	74
Operating temperature range-Heating (°c)	-15~43				
Operating temperature range-Cooling (°c)	5~43				
Leaving water temprature range-Heating (°c)	18~40				
Leaving water temprature range-Cooling (°c)	12~40				
Refrigerant Type	R32/R410A				
Refrigerant GWP	675				
Refrigerant charge (kg)	3.2	-	6.4	12.8	12.8
Operation Pressure Low Side (Mpa)	2.1	2.1	2.1	2.1	2.1
Operation Pressure High Side (Mpa)	4.4	4.4	4.4	4.4	4.4
Unit size (mm)	950x950x1280	950x950x1280	1100x1100x2340	2260x1100x2340	2260x1100x2340
Packing size (mm)	1025x1025x1430	1025x1025x1430	1160x1160x2500	2360x1160x2500	2360x1160x2500
Unit Net weight (kg)	240/270	250/280	480/510	820/860	920/960

FRONT DISCHARGE

Models

MODEL	INVFRONT-3007	INVFRONT-3011	INVFRONT-3016	INVFRONT-3018
PERFORMANCE CONDITION	A27 / W26 C°			
Heating Output (kW)	2.50~7.80	3.49~11.20	5.82~16.1	5.90~18.5
Power Input (kW)	0.17~1.16	0.31~1.71	0.50~2.43	0.50~2.78
COP	14.70~6.72	11.26~6.55	11.64~6.63	11.8~6.65
PERFORMANCE CONDITION	A15 / W26 C°			
Heating Output (kW)	1.81~6.05	2.58~8.90	4.00~12.4	4.05~14.1
Power Input (kW)	0.20~1.09	0.30~1.69	0.48~2.41	0.49~2.75
COP	9.05~5.55	8.6~5.27	8.33~5.15	8.27~5.13
PERFORMANCE CONDITION	A45 / W30 C°			
Cooling Output (kW)	1.23~3.55	1.56~4.62	2.55~7.1	2.55~7.1
Power Input (kW)	0.41~1.65	0.51~2.20	0.82~3.0	0.82~3.1
EER	3.00~2.15	3.06~2.10	3.11~2.29	3.11~2.29
PERFORMANCE CONDITION	A35 / W30 C°			
Cooling Output (kW)	1.35~5.03	1.6~6.5	2.8~9.3	2.8~9.3
Power Input (kW)	0.36~1.65	0.45~2.2	0.65~3.1	0.65~3.1
EER	3.75~3.05	3.56~2.94	4.31~3.00	4.31~3.00
Power Supply (V/Hz/Ph)	220-240//1/50/60	220-240//1/50/60	220-240//1/50/60	220-240//1/50/60
Rated Heating Capacity (kW)	7	11	15	15
Rated power Input (kW)	1.7	2.3	3.2	3.3
Rated current (A)	8	9.5	13.5	13.5
Compressor Type-Quantity	1	1	1	1
Fan type	DC	DC	DC	DC
Fan Quantity	1	1	1	1
Fan Air flow (m3/ h)	1800	1800	2400	2400
Throttling device	EEV	EEV	EEV	EEV
Sound pressure level 1/3/5/10 (dB(A))	45/37/33/28	46/38/34/29	50/43/39/33	50/43/39/33
Water Side Heat Exchanger Type	Twisted Titanium Heat Exchanger			
Water Pressure Drop (kPa)	6	7	9	11
Water connection (mm)	threaded / 50	threaded / 50	threaded / 50	threaded / 50
Nominal Water Flow (m3/h)	2.40	3.5	5.2	5.8
Operating temperature range-Heating (°C)	-15~43			
Operating temperature range-Cooling (°C)	5~43			
Leaving water temprature range-Heating (°C)	18~40			
Leaving water temprature range-Cooling (°C)	12~40			
Refrigerant Type	R32/R410A			
Refrigerant GWP	675			
Refrigerant charge (kg)	1.4	1.4	1.9	1.9
Operation Pressure Low Side (Mpa)	2.1	2.1	2.1	2.1
Operation Pressure High Side (Mpa)	4.4	4.4	4.4	4.4
Unit size (mm)	900×340×623	900×340×623	1020×440×673	1020×440×673
Packing size (mm)	960x400x786	960x400x786	1080x500x836	1080x500x836
Unit/Shipping weight (kg)	38/53	40/55	62/80	70/88

FRONT DISCHARGE

Models

MODEL	INVFRONT-3021	INVFRONT-3026	INVFRONT-3030 S	INVFRONT-3035 S
PERFORMANCE CONDITION	A27 / W26 C°			
Heating Output (kW)	8.15~21.2	8.3~26.0	6.6~30.00	7.7~35.0
Power Input (kW)	0.74~2.83	0.75~4.20	0.44~4.45	0.52~5.3
COP	11.01~7.51	11.07~6.19	15.00~6.74	14.53~6.60
PERFORMANCE CONDITION	A15 / W26 C°			
Heating Output (kW)	5.96~17.0	6.06~20.2	5.3~23.0	6.0~26.0
Power Input (kW)	0.72~2.96	0.73~4.05	0.63~4.70	0.74~5.50
COP	8.28~5.73	8.30~4.99	8.41~4.89	8.11~4.73
PERFORMANCE CONDITION	A45 / W30 C°			
Cooling Output (kW)	2.8-11.8	2.8-11.8	4.76-15.5	4.76-15.7
Power Input (kW)	0.7-4.5	0.7-4.5	1.21-6.1	1.21-6.2
EER	4.0-2.62	4.0-2.62	3.93-2.54	3.93-2.53
PERFORMANCE CONDITION	A35 / W30 C°			
Cooling Output (kW)	3.3-14.0	3.3-14.0	5.8-19.0	5.8-20.0
Power Input (kW)	0.55-4.0	0.55-4.0	1.0-5.7	1.0-6.1
EER	6.0-3.50	6.0-3.50	5.75-3.33	5.75-3.28
Power Supply (V/Hz/Ph)	220-240//1/50/60	220-240//1/50/60	380-415/3/50/60	380-415/3/50/60
Rated Heating Capacity (kW)	21	26	30	35
Rated power Input (kW)	4.6	4.6	6.2	7.7
Rated current (A)	21	21	11	14
Compressor Type-Quantity	1	1	1	1
Fan type	DC	DC	DC	DC
Fan Quantity	1	1	1	1
Fan Air flow (m3/ h)	3500	4000	5500	6000
Throttling device	EEV	EEV	EEV	EEV
Sound pressure level 1/3/5/10 (dB(A))	53/46/42/36	54/47/43/37	55/48/44/38	56/49/45/39
Water Side Heat Exchanger Type				
Water Pressure Drop (kPa)	13	16	23	25
Water connection (mm)	threaded / 50	threaded / 50	threaded / 50	threaded / 50
Nominal Water Flow (m3/h)	6.8	8.1	9.7	11.3
Operating temperature range-Heating (°C)	-15~43			
Operating temperature range-Cooling (°C)	5~43			
Leaving water temprature range-Heating (°C)	18~40			
Leaving water temprature range-Cooling (°C)	12~40			
Refrigerant Type	R32/R410A			
Refrigerant GWP	675			
Refrigerant charge (kg)	1.9	1.9	1.9	1.9
Operation Pressure Low Side (Mpa)	2.1	2.1	2.1	2.1
Operation Pressure High Side (Mpa)	4.4	4.4	4.4	4.4
Unit size (mm)	1100×440×877	1100×440×877	1100×470×980	1100×470×980
Packing size (mm)	1160x500x1040	1160x500x1040	1160x530x1140	1160x530x1140
Unit/Shipping weight (kg)	95/115	104/124	120/140	120/140

TEMPERATURE CONTROL

FRONT DISCHARGE

Models

MODEL	INVFRONT-3065 S	INVFRONT-3100 S	INVFRONT-3150 S	INVFRONT-3220 S	INVFRONT-3220 S L
PERFORMANCE CONDITION	A27 / W26 C°				
Heating Output (kW)	14.2-60.0	24.2-110.0	37.8-160.0	48.5-220.0	48.5-220.0
Power Input (kW)	1.03-9.8	1.8-18.5	2.75-26.2	3.58-36.9	3.58-36.9
COP	13.79-6.12	13.44-6.16	13.75-6.11	13.55-6.10	13.55-6.10
PERFORMANCE CONDITION	A15 / W26 C°				
Heating Output (kW)	10.1-46.0	18.5-85.0	27.1-123.2	37.1-172	37.1-172
Power Input (kW)	1.4-9.6	2.6-17.5	3.67-26.2	5.1-35.3	5.1-35.3
COP	7.21-4.79	7.12-4.86	7.38-4.70	7.27-4.87	7.27-4.87
PERFORMANCE CONDITION	A45 / W30 C°				
Cooling Output (kW)	8.5-29.0	12.8-52.5	23.0-83.2	25.5-105	25.5-105
Power Input (kW)	2.2-10.5	3.35-20.0	5.90-30.9	6.75-40.2	6.75-40.2
EER	3.86-2.76	3.82-2.63	3.90-2.69	3.78-2.61	3.78-2.61
PERFORMANCE CONDITION	A35 / W30 C°				
Cooling Output (kW)	10.0-42.0	17.0-70.3	28.0-112.0	34.0-141	34.0-141
Power Input (kW)	1.54-12.0	2.65-20.0	4.34-31.5	5.3-40.0	5.3-40.0
EER	6.50-3.50	6.42-3.52	6.45-3.55	6.42-3.53	6.42-3.53
Power Supply (V/Hz/Ph)	380-415/3/60	380-415/3/60	380-415/3/60	380-415/3/60	380-415/3/60
Rated Heating Capacity (kW)	60	110	150	220	220
Rated power Input (kW)	12.0	21.4	32.0	43.4	43.4
Rated current (A)	21	38	57	78	78
Compressor Type-Quantity	1	1	1	1	1
Fan type	DC	DC	DC	DC	DC
Fan Quantity	2	2	2	2	2
Fan Air flow (m3/ h)	12000	24000	28000	48000	48000
Throttling device	EEV				
Sound pressure level 1/3/5/10 (dB(A))	63/56/53/47	65/59/56/50	66/60/57/52	68/62/59/54	66/61/58/55
Water Side Heat Exchanger Type					
Water Pressure Drop (kPa)	30	30	30	34	34
Water connection (mm)	threaded / 63	flange/ 90	flange/ 110	flange/ 110	flange/ 110
Nominal Water Flow (m3/h)	19.3	35.4	48.3	70.9	70.9
Operating temperature range-Heating (°C)	-15~43				
Operating temperature range-Cooling (°C)	5~43				
Leaving water temprature range-Heating (°C)	18~40				
Leaving water temprature range-Cooling (°C)	12~40				
Refrigerant Type	R32/R410A				
Refrigerant GWP	675				
Refrigerant charge (kg)	1.9	1.9	1.9	1.9	1.9
Operation Pressure Low Side (Mpa)	2.1	2.1	2.1	2.1	2.1
Operation Pressure High Side (Mpa)	4.4	4.4	4.4	4.4	4.4
Unit size (mm)	1455×755×1705	2188×755×1705	2188×755×1705	2188×1240×2340	2300×1640×2340
Packing size (mm)	1505×805×1855	2238×805×1855	2238×805×1855	2275×1325×2530	2387×1725×2530
Unit/Shipping weight (kg)	330/365	480/520	730/780	950/990	1050/1090



Your global partner since 1974. Trusted for superior quality and exceptional innovations.



Head Office

AQUA S.p.A

42018 San Martino in Rio, Reggio Emilia
Italy - Via Crotti, 1
P: +39 0522 695805/85 - F: +39 0522 646160
aqua@aqua.it | www.aqua.it



Branches

AQUA WATER SYSTEMS LTD

Unit 135 Oak Drive Hartlebury Trading Estate,
Worcestershire, DY10 4JB
P: +44 (0)1299 251050, F: +44 (0)1299 253704
sales@askaqua.co.uk | www.askaqua.co.uk

AQUA FILTRACION S.A.

Pol. Ind. Castellbisbal Sud 08755
Castellbisbal, Barcelona
P: +34 (0)93 7711855, F: +34 (0)93 7711772
info@aqua.es | www.aqua.es

AQUA SU ARITIMI SAN. VE MUH. TIC. LTD. STI.

Ferhatpasa Mahallesi Maresal Fevzi Cakmak
Cad. No:45 Pk.34888 Atasehir / Istanbul - Turkey
P: +90 216 661 60 60, F: +90 216 661 68 50
info@aqua.com.tr | www.aqua.com.tr

AQUA S.p.A - POOL DIVISION

46043 Castiglione d. Stiviere, Mantova - Italy
P: +39 0376 671973 - F: +39 0376 940139
infopools@aqua.it | www.aqua.it

AQUA MIDDLE EAST FZC

1J-07/4 and 1J-07/3 - Hamriyah Free Zone
P.O.Box 42585 Sharjah - United Arab Emirates
P: +971 6 526 0563, F: +971 6 526 0564
contact@aqua-me.ae
www.aqua-me.ae

AQUA WATER SYSTEMS INDIA PVT LTD

4A/4B/4C-, Puttappa Industrial Estate
Mahadevapura Post, White Field Road,
Bangalore 560 048
P: 0091 80 4152 1313, F: 0091 80 4152 1414
contact@aquaindia.in | sales@aquaindia.in
www.aquaindia.in



AQUA GROUP RUS

Juridical Address:
107014, Egerskaya str, 1, Moscow, Russia
Residence Address:
127081, Chermianskaya str, 3, Moscow, Russia
P: +7 495 6458078, F: +7 495 969 2413
mail@aqua-italy.ru | www.aqua-italy.ru
www.aqua.it

AQUA GROUP LLC

Office : Regus - Sarayat EL Maadi, Egypt
Management & Warehouse : Plot no 2-2nd service
axe, 2nd Industrial Zone, October, Egypt
P: +20 2 3820 2259 | info@aqua.eg