

## TECHNOPOOL 2 PH-RX

### Context of use:

- For private pools with double built-in pH and Rx tool, suitable for the dosing of acid/alkaline correctors depending on the pH reading, and for the dosing of chlorine or other disinfectants depending on the Rx potential reading.

### Description:




- Double peristaltic pump with pH and Rx built-in instrument to measure and adjust pH and Redox potential.
- Proportional dosing.
- Display with digital controls
- Measurement range 5-9 pH, 0-999 mV
- Acoustic alarms
- Protection password
- Power supply 220-230V 50/60Hz.
- With installation kit and equipment consists of:
  - Suction/injection pipe , buffer solutions
  - Wall fixing bracket and dowels pH and Rx electrodes
  - N°2 2-1 Probe Holder with Injection valve for tube DN50-63
  - Injection valves
  - Foot filters. (2x)
- Compatible with:
  - Level probes
  - Flow and temperature probe

### Standards:

- No. 2004/108/CE EMC directive
- No. 2006/95/CE "DBT low voltage directive"
- No. 2011/65/UE , 2002/96/CE "RoHS and WEEE directives"

### Package size: (LxHxW)

390x445x165 mm

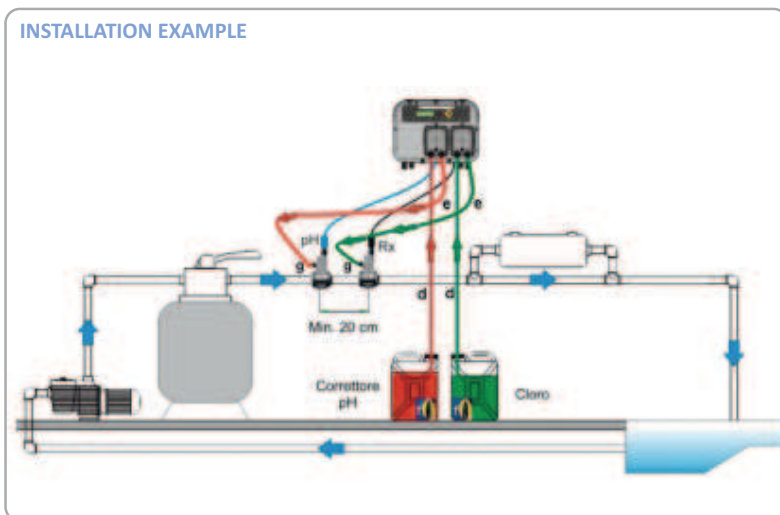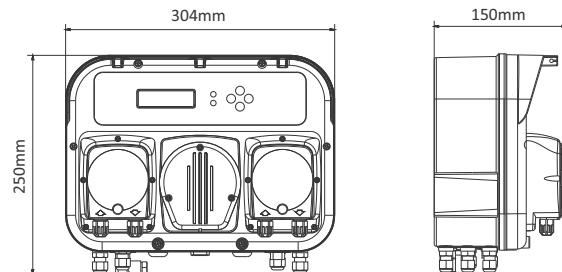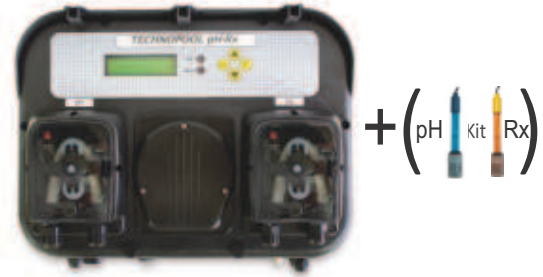

INSTALLATION KIT			
	2 in 1 injection probe holder ADPSTC		Foot filter 4x6 ADSP6000001
	pH electrode with 5m cable ADELTPH05		Drilling tip cone Ø24 ADSP6000593
	Rx electrode with 5m cable ADELTRX05		pH4 and pH7 buffer solutions ADSPH4 - ADSPH7
	Tubo in PVC Ø4x6, 4m ADSP6000551		mV 475 buffer solution ADSRX
	Wall fixing bracket ADSP6020156		Wall plugs and screws ADSP6000041

CODE	FLOW RATE l/h	PRESSURE bar	WATT	PIPE	PACKING	WEIGHT kg	VOLUME m³
AD0T00G0G000A100	1.4/1.4	1	12	4 x 6	1	4.1	0.026
AD0T00G0T000A100	1.4/3	1	12	4 x 6	1	4.1	0.026